

STORA BASE 100 - H100

with galvanised mesh grating C250, mesh 30x10mm

EN1433:2005

C250



DESCRIPTION

Polyester concrete drainage channel, width 100, height 100 with galvanised mesh grating C250, mesh 30x10mm. Drainage channels for car parks, shopping streets and pavements.

PRODUCT ADVANTAGES

- Galvanised mesh grating C250, mesh 30x10mm
- Waterway area of the grating: 2,20 dm²
- Hydraulic capacity of the grating: 14,46 L/sec
- Drainage channel with 2mm galvanized profile
- Predrilled vertical outlet Ø110
- Release through leverage by any traditional tools
- The channels are assembled against each other by means of a tongue and groove jointing system (male/female); to ensure the channels watertightness it is recommended to use a suitable elastic polyurethane sealant.
- Can be installed in cascade with height 150, 200 and 250.

MATERIAL

- Channel: polyester concrete
- Channel profile: galvanised steel
- Gratting: galvanised steel

CERTIFICATION

Certified EN 1433:2005




PLACE OF INSTALLATION

Group 3, Class C250 →see EN1433

Kerb sides and non-trafficked areas of hard shoulders and similar.

OPTIONS

- Endcap with or without outlet
- Sump unit
- Stepped fall
- Also available in height 80, 150, 200 and 250
- Standard 0,5m channel with vertical outlet Ø110

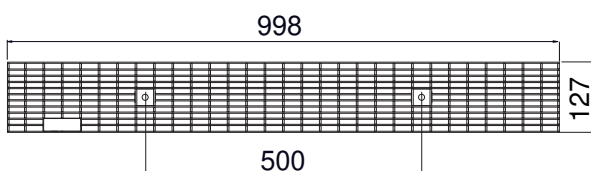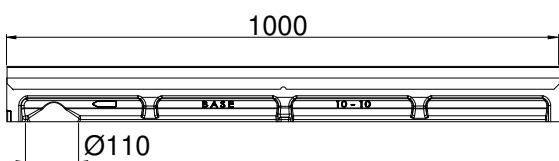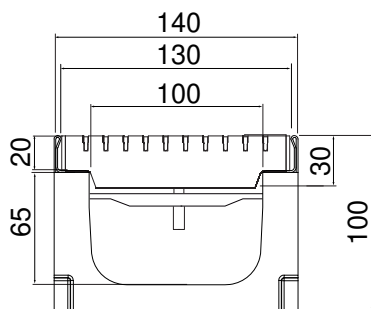

REFERENCE	ARTICLE N°	KG	UNITS PER PALLET
Stora-Base 100 H100 galvanised mesh grating C250, mesh 30x10mm	SB10101225	14,00	42
Stora-Base 100 H100 channel 1m	SB10101000C	9,30	
Galvanised mesh grating C250, mesh 30x10mm		4,70	

Sizes in mm - Weights, sizes and sketch are indicative - Uncontrolled distribution.