

## STORA LIGHT 100 - H75

with slotted galvanised grating A15, 6mm slot

EN1433:2005

A15



### DESCRIPTION

Polypropylene drainage channel width 100, height 75 with slotted galvanised grating A15, 6mm slot.

### PRODUCT ADVANTAGES

- Lightweight channel, made of polypropylene.
- Waterway area of the grating: 1,42 dm<sup>2</sup>
- Hydraulic capacity of the grating: 9,33 L/sec
- The edges of the channel are not visible after installation = aesthetic.
- Grating with FIX system and anti-slip profile.
- Grating slot < 20 mm, for additional security for wheelchairs and bicycles.
- Height 75 mm = ideal in combination with paving stones = easy installation
- Pre-formed / to be cut out vertical outlet Ø100mm
- The channels are assembled against each other by means of a tongue and groove jointing system (male/female); to ensure the channels watertightness it is recommended to use a suitable elastic polyurethane sealant.
- Easy, 100% recyclable = environment friendly

### MATERIAL

- Channel: polypropylene
- Grating: galvanised steel

### CERTIFICATION

Certification EN1433:2005




### PLACE OF INSTALLATION

Group 1, Class A15 → see EN1433

Around private houses: on terraces and on domestic driveways.

### OPTIONS

- Sealant for the watertightness of connections
- Endcap with preformed outlet
- Connection pipe Ø110mm

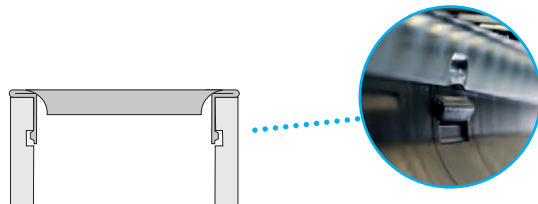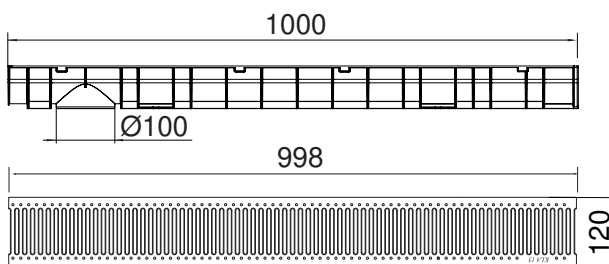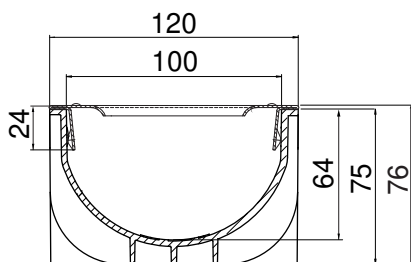

FIX system

REFERENCE	ARTICLE N°	KG	UNITS PER PALLET
Stora-Light 100 H75 slotted galvanised grating A15, slots 6mm	S6500262	2,25	96
Stora-Light 100 H75 channel 1m	S6500250	0,75	-
Slotted galvanised grating A15, slots 6mm	-	1,50	-

Sizes in mm - Weights, sizes and sketch are indicative - Uncontrolled distribution.